


# HIRE ATTACHMENT FOR STR-MASTIC REMOVAL TOOL DS4

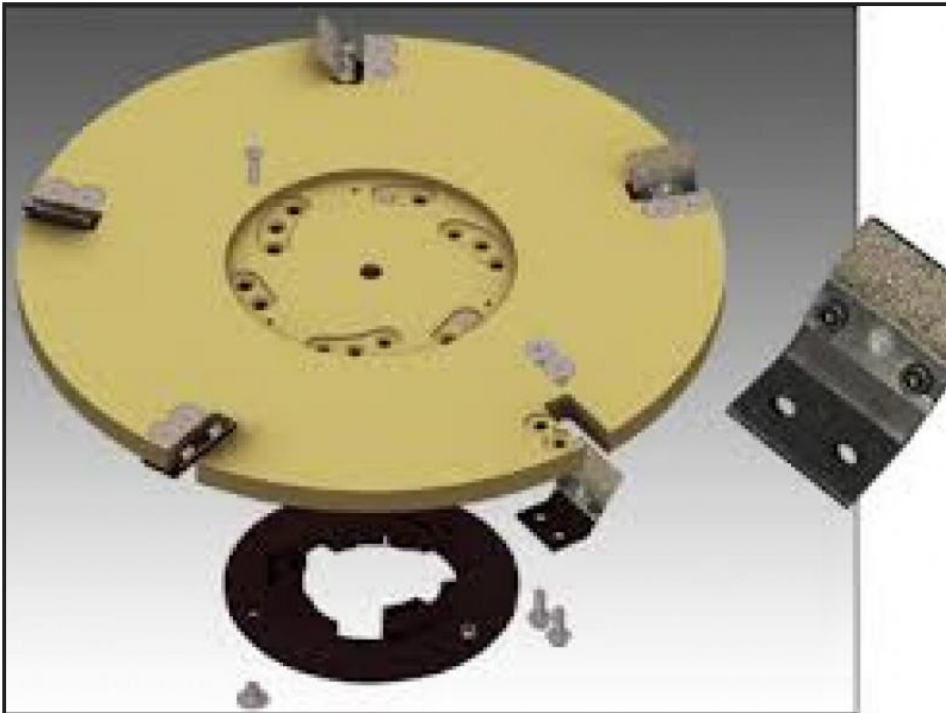

© 2010 by the manufacturer. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage or retrieval system, without the prior written permission of the manufacturer.

Caution: The Manufacturer is not responsible for damage to the floor, the floor machine or for any harm or injury resulting from use of this attachment.

These warnings contain advice on possible device application circumstances. They are intended to inform you of the potential risks of floor. These warnings do not contain a complete list of all possible risks of use that are applicable to you.

**Standard Operating Procedures for Mastic Tool**

- 1) Always use the correct protective equipment such as eye protection, safety glasses, machine shoes and ear protection.
- 2) Always make sure the floor is prepared and free of any debris or grime before using the tool.
- 3) Remove the floor surface and cover.
- 4) Use the tool to remove mastic.
5. You have to be "Careful" if you make repairs as necessary.
6. Care must be applied to the floor.
7. Initially a dedicated electrical circuit for the floor machine.
8. Ensure a small, non-slippery area of floor remains, such as a corner.
- 9) Prepare a suitable area.
10. Move to the next area.
11. Adjust the tool to the floor to be prepared.
12. Prepare a suitable system on a separate circuit.
- 13) Always wear the machine and floor to use.
14. Start operation. Do not jump and use.
15. Operate the tool over the mastic and floor.
16. The tool of the tool on the floor, moving left to right (Corner where the tool is used).
17. After using, and if the floor is not prepared, clean up with the correct tool face.
18. Work the tool and use until the mastic is removed.

**Weekly Hire: £55.00**

This attachment when fitted to the STR machine can remove most mastic-type products from most concrete surfaces, due to its design it doesn't block up as much as other attachments, can be used wet or dry.&nbsp;

Product Details	
<b>Category/Type</b>	<b>STR FLOOR MACHINE</b>
<b>Make</b>	<b>HIRE ATTACHMENT FOR STR-</b>
<b>Model</b>	<b>MASTIC REMOVAL TOOL DS4</b>
<b>Power</b>	<b>N/A</b>
<b>Weight</b>	<b>10KG</b>