

# SURFACE SCABBLER

- rotary surface scabbler
- replaceable cutters
- solid tungsten cutters or tct cutters
- leaves peened or roughened surface
- dust free with vac
- for paint, render & refurbishment trades



EPO180H surface scabbler  
481187



dust guard  
356560F

C6 scabbler head  
346386






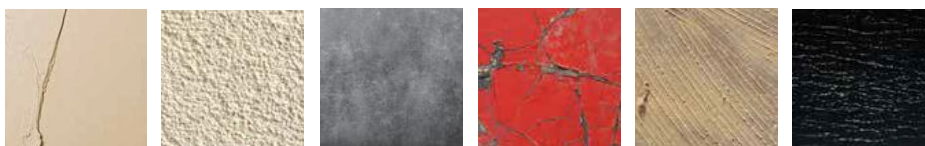
EPO180H-SRX6 Surface Scabbler  
Power 1500w  
Speed 1300-4000rpm  
Weight 5.9kg  
Prep head 150mm  
Prep rate up to 30m/hr  
Vibration level 7.9m/s  
Noise level 79dBA  
Voltage 110v or 230v



**EIBENSTOCK**



EPO180 SCABBLER CUTTERS & BUSH HEAD		APPLICATIONS
	C6 tungsten carbide tipped cutters, scalloped shape with 8 points Size 30x6.0mm  Stock code: 348146 (set of 14)	For render and plaster; leaves a rough finish
	C5 solid tungsten star cutters with 15 points Size 30x5.0mm  Stock code: 348505 (set of 21)	For keying hard coatings & epoxies; leaves a keyed surface
	C4 solid tungsten carbide claw cutters with 10 points Size 30x4mm  Stock code: 348284 (set of 28)	For keying back coatings, elastomerics, adhesives & bitumens



old plaster

render

concrete

floor paint

adhesive

bitumens